

Job Name:	
Tag#	



Submittal Data Sheet	FTXR12TVJUW(S)
1-Ton Wall Mounted Indoor Unit	



Indoor Specifications				
	Cooling		Heating	
	H	M	H	M
Airflow Rate (cfm)	335	219	395	290
	L	SL	L	SL
	169	131	226	131
Sound (dBA) H / M / L / SL	45 / 34 / 26 / 20		45 / 37 / 29 / 20	
Dimensions (H x W x D) (in)	11-15/16 x 39-5/16 x 8-3/8			
Weight (Lbs)	27			
Nominal Capacity (Btu/hr)	12,000			

*See Outdoor Unit for Rated Capacities

Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Piping	
Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	1 1/16

	Electrical	
	Cooling	Heating
Running Current (Rated) (A)	.13/.12*	.19/.17*
Power Consumption (Rated) (W)	26/26*	38/38*


*208/230V

Color Selection	
White	
Silver	

Optional Accessories	
-----------------------------	--

Included	Part Number	Description
	AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)
	AZAI6WSPDKC	DKN Plus Interface
	DTST-ONE-ADA-A	Daikin <i>One+</i> Smart Thermostat for Ductless Products
	BRC944B2	Wired Remote Controller
	BRCW901A03	Wired Remote Controller Cable - 10 ft
	BRCW901A08	Wired Remote Controller Cable - 25 ft
	KRP928BB2S	Interface adaptor for DIII-NET
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KAF970A46	Air-purifying filter with photocatalytic deodorizing function (without frame)

FTXR12TVJUW(S) Dimensional Data

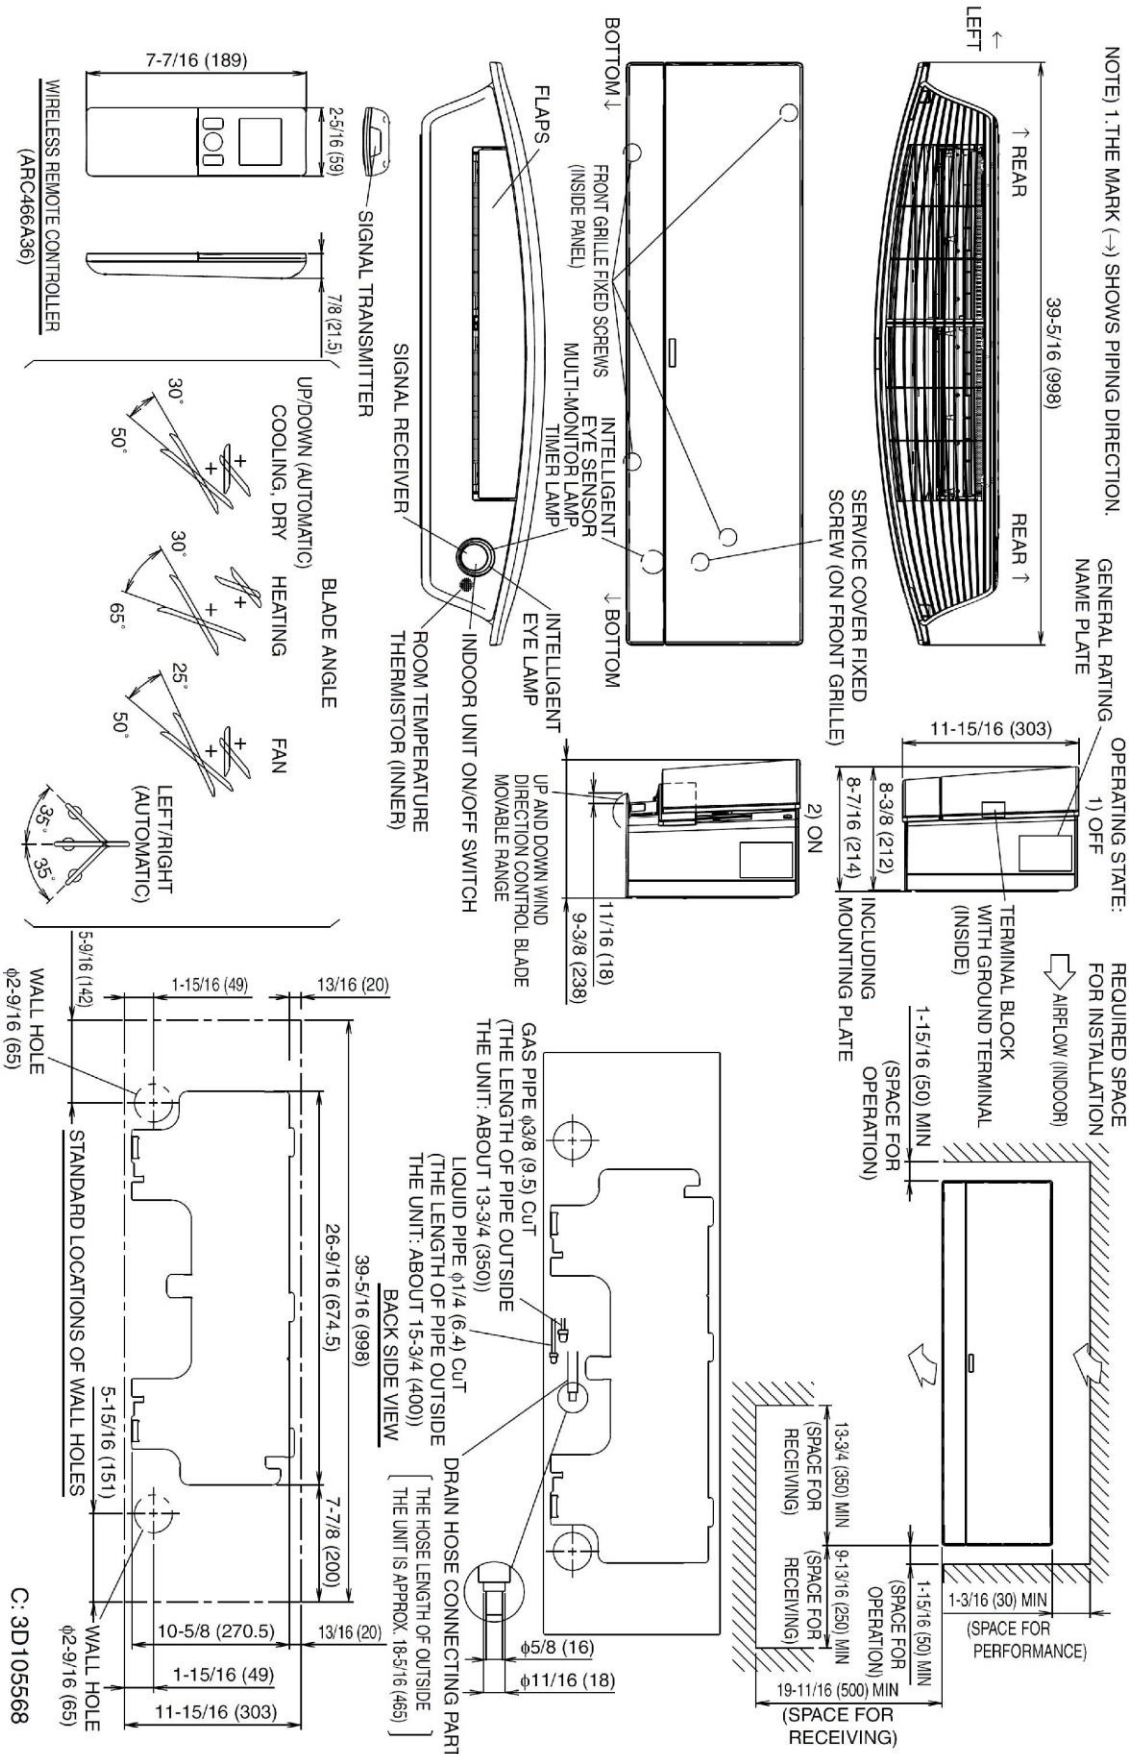

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)